




## STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9  
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M  
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)  
MADE BY LOST WAX INVESTMENT CASTING

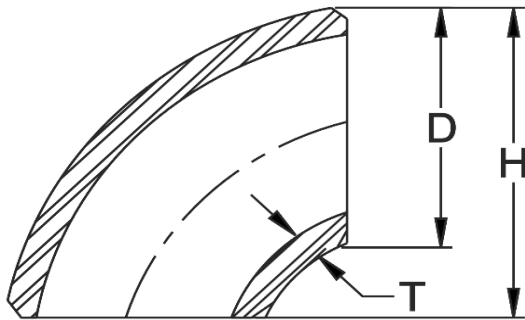

### BUTT WELD ELBOW 90° LONG RADIUS

SIZE	SCH	D	T	H	Weight
		(mm)	(mm)	(mm)	(Kg/Pc)
½"	10s	21.3	2.11	48.75	0.06
½"	40s	21.3	2.77	48.75	0.08
¾"	10s	26.7	2.11	51.45	0.08
¾"	40s	26.7	2.87	51.45	0.09
1"	10s	33.4	2.77	54.80	0.13
1"	40s	33.4	3.38	54.8	0.16
1¼"	10s	42.2	2.77	68.70	0.21
1¼"	40s	42.2	3.56	68.70	0.25
1½"	10s	48.3	2.77	81.35	0.29
2"	10s	60.3	2.77	106.35	0.53
2½"	10s	73.0	3.05	131.80	0.85
2½"	40s	73.0	5.16	131.8	1.36
3"	10s	88.9	3.05	158.75	1.22
4"	10s	114.3	3.05	209.55	2.15
5"	10s	141.3	3.40	261.15	3.63
6"	10s	168.3	3.40	312.75	4.90