




STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

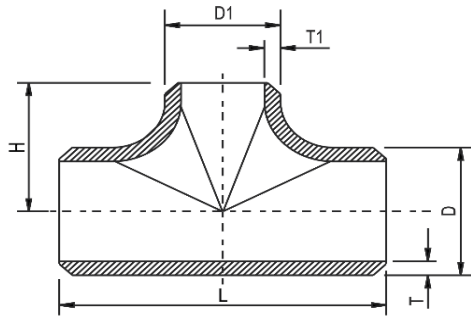

BUTT WELD REDUCED TEE

SIZE	SCH	L (mm)	D (mm)	D1 (mm)	T (mm)	T1 (mm)	H (mm)	Weight (Kg/Pc)
¾" x ½"	10s	58.0	26.7	21.3	2.11	2.11	29.0	0.090
1" x ½"	10s	76.0	33.4	21.3	2.77	2.11	38.0	0.190
1" x ¾"	10s	76.0	33.4	26.7	2.77	2.11	38.0	0.190
1¼" x ½"	10s	95.2	42.2	21.3	2.77	2.11	47.6	0.284
1¼" x ¾"	10s	95.2	42.2	26.7	2.77	2.11	47.6	0.288
1¼" x 1"	10s	95.2	42.2	33.4	2.77	2.77	47.6	0.450
1½" x ½"	10s	114.0	48.3	21.3	2.77	2.11	57.0	0.395
1½" x ¾"	10s	114.0	48.3	26.7	2.77	2.11	57.0	0.390
1½" x 1"	10s	114.0	48.3	33.4	2.77	2.77	57.0	0.420
1½" x 1¼"	10s	114.0	48.3	42.2	2.77	2.77	57.0	0.430
2" x ½"	10s	128.0	60.3	21.3	2.77	2.11	44.0	0.479
2" x ¾"	10s	128.0	60.3	26.7	2.77	2.11	44.0	0.510
2" x 1"	10s	128.0	60.3	33.4	2.77	2.77	51.0	0.540
2" x 1¼"	10s	128.0	60.3	42.2	2.77	2.77	57.0	0.571
2" x 1½"	10s	128.0	60.3	48.3	2.77	2.77	60.0	0.590
2½" x ¾"	10s	152.0	73.0	26.7	3.05	2.11	64.0	0.810
2½" x 1"	10s	152.0	73.0	33.4	3.05	2.77	67.0	0.781
2½" x 1¼"	10s	152.0	73.0	42.2	3.05	2.77	67.0	0.874
2½" x 1½"	10s	152.0	73.0	48.3	3.05	2.77	67.0	0.900
2½" x 2"	10s	152.0	73.0	60.3	3.05	2.77	70.0	0.940
3" x ¾"	10s	172.0	88.9	26.7	3.05	2.11	70.0	1.093
3" x 1"	10s	172.0	88.9	33.4	3.05	2.77	73.0	1.150
3" x 1¼"	10s	172.0	88.9	42.2	3.05	2.77	73.0	1.110
3" x 1½"	10s	172.0	88.9	48.3	3.05	2.77	73.0	1.190
3" x 2"	10s	172.0	88.9	60.3	3.05	2.77	76.0	1.230
3" x 2½"	10s	172.0	88.9	73.0	3.05	3.05	83.0	1.310
4" x 1"	10s	210.0	114.3	33.4	3.05	2.77	86.0	1.825
4" x 1½"	10s	210.0	114.3	48.3	3.05	2.77	86.0	1.750
4" x 2"	10s	210.0	114.3	60.3	3.05	2.77	89.0	2.000
4" x 2½"	10s	210.0	114.3	73.0	3.05	3.05	95.0	2.080
4" x 3"	10s	210.0	114.3	88.9	3.05	3.05	98.0	2.150
5" x 3"	10s	248.0	141.3	88.9	3.40	3.05	111.0	3.130
5" x 4"	10s	248.0	141.3	114.3	3.40	3.05	117.0	3.260
6" x 3"	10s	286.0	168.3	88.9	3.40	3.05	124.0	4.900