




STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

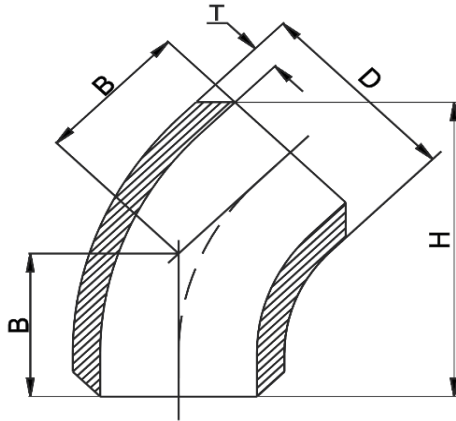

BUTT WELD ELBOW 45° LONG RADIUS

SIZE	SCH	D	T	B	H	Weight
		(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
½"	10s	21.3	2.11	15.9	33.18	0.030
½"	40s	21.3	2.77	15.9	33.26	0.035
¾"	10s	26.7	2.11	19.0	40.38	0.030
¾"	40s	26.7	2.87	19.0	40.46	0.040
1"	10s	33.4	2.77	22.2	47.75	0.090
1"	40s	33.4	3.38	22.2	48.29	0.110
1¼"	10s	42.4	2.77	25.4	56.39	0.110
1¼"	40s	42.4	3.56	25.4	56.93	0.170
1½"	10s	48.3	2.77	28.6	63.94	0.170
1½"	40s	48.3	3.68	28.6	63.94	0.230
2"	10s	60.3	2.77	34.9	78.94	0.250
2½"	10s	73.0	3.05	44.5	99.62	0.480
2½"	40s	73.0	5.16	44.5	98.13	0.770
3"	10s	88.9	3.05	50.8	116.00	0.630
4"	10s	114.3	3.05	63.5	146.66	1.080
5"	10s	141.3	3.40	79.4	183.10	1.810
5"	40s	141.3	6.55	79.4	184.10	3.430