




STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

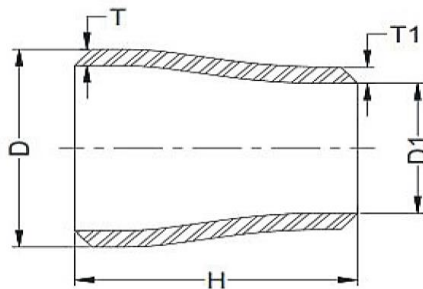

BUTT WELD CONCENTRIC REDUCER

SIZE	SCH	D	D1	T	T1	H	Weight
		(mm)	(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
¾" x ½"	10s	26.7	21.3	2.11	2.11	39.3	0.100
1" x ½"	10s	33.4	21.3	2.77	2.11	50.8	0.120
1" x ¾"	10s	33.4	26.7	2.77	2.11	50.8	0.130
1¼" x ½"	10s	42.2	21.3	2.77	2.11	50.8	0.103
1¼" x ¾"	10s	42.2	26.7	2.77	2.11	50.8	0.180
1¼" x 1"	10s	42.2	33.4	2.77	2.77	50.8	0.180
1½" x ½"	10s	48.3	21.3	2.77	2.11	63.5	0.200
1½" x ¾"	10s	48.3	26.7	2.77	2.11	63.5	0.200
1½" x 1"	10s	48.3	33.4	2.77	2.77	63.5	0.200
1½" x 1¼"	10s	48.3	42.2	2.77	2.77	63.5	0.210
2" x ¾"	10s	60.3	26.7	2.77	2.11	76.2	0.250
2" x 1"	10s	60.3	33.4	2.77	2.77	76.2	0.280
2" x 1¼"	10s	60.3	42.2	2.77	2.77	76.2	0.300
2" x 1½"	10s	60.3	48.3	2.77	2.77	76.2	0.310
2½" x 1¼"	10s	73.0	42.2	3.05	2.77	88.9	0.440
2½" x 1½"	10s	73.0	48.3	3.05	2.77	88.9	0.440
2½" x 2"	10s	73.0	60.3	3.05	2.77	88.9	0.470
3" x 1½"	10s	88.9	48.3	3.05	2.77	88.9	0.510
3" x 2"	10s	88.9	60.3	3.05	2.77	88.9	0.550
3" x 2½"	10s	88.9	73.0	3.05	3.05	88.9	0.590
4" x 2"	10s	114.3	60.3	3.05	2.77	101.6	0.780
4" x 2½"	10s	114.3	73.0	3.05	3.05	101.6	0.830
4" x 3"	10s	114.3	88.9	3.05	3.05	101.6	0.870