




STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD
 DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE
 MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
 PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
 MADE BY LOST WAX INVESTMENT CASTING

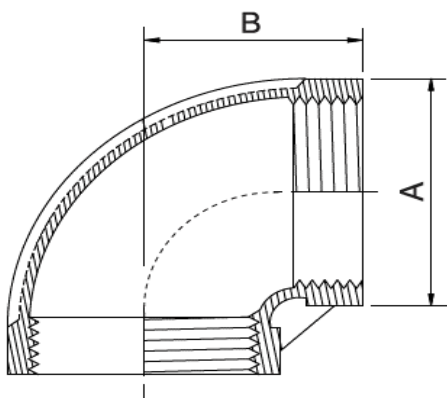

ELBOW 90° F.F.

Standard
Pattern

Size	A	B	Weight
	(mm)	(mm)	(Kg/Pc)
1/8"	17.0	17.0	0.020
1/4"	20.7	19.0	0.030
3/8"	26.3	21.3	0.040
1/2"	32.8	26.8	0.060
3/4"	32.8	31.5	0.090
1"	42.0	34.8	0.140
1 1/4"	50.1	42.0	0.250
1 1/2"	57.2	46.2	0.360
2"	69.3	52.4	0.500
2 1/2"	90.0	68.9	1.107
3"	100.0	74.0	1.348
4"	127.0	90.4	2.134