


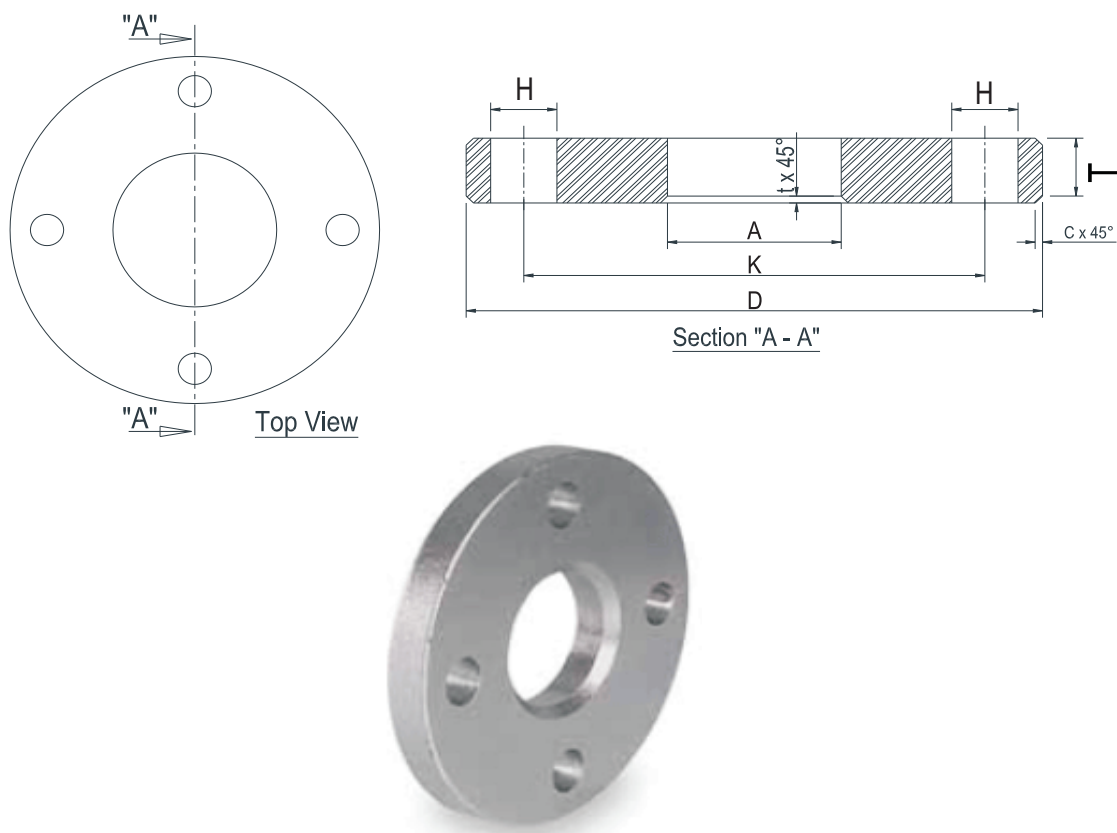

## UNI 6089 / DIN 2642 PN 10 LOOSE

| Size   |      | Flange |     |    |     |     |   | Drilling |    | Weight  |
|--------|------|--------|-----|----|-----|-----|---|----------|----|---------|
| mm     | inch | D      | A   | T  | K   | C   | t | Bolt no. | H  | Kg / Pc |
| DN 15  | ½"   | 95     | 25  | 12 | 65  | 1.0 | 3 | 4        | 14 | 0.56    |
| DN 20  | ¾"   | 105    | 30  | 14 | 75  | 1.0 | 4 | 4        | 14 | 0.81    |
| DN 25  | 1"   | 115    | 37  | 16 | 85  | 1.0 | 4 | 4        | 14 | 1.09    |
| DN 32  | 1¼"  | 140    | 46  | 16 | 100 | 1.5 | 4 | 4        | 18 | 1.60    |
| DN 40  | 1½"  | 150    | 52  | 16 | 110 | 1.5 | 4 | 4        | 18 | 1.82    |
| DN 50  | 2"   | 165    | 64  | 16 | 125 | 1.5 | 4 | 4        | 18 | 2.15    |
| DN 65  | 2½"  | 185    | 80  | 16 | 145 | 1.5 | 4 | 4        | 18 | 2.62    |
| DN 80  | 3"   | 200    | 94  | 18 | 160 | 1.5 | 5 | 4        | 18 | 3.31    |
| DN 100 | 4"   | 220    | 119 | 18 | 180 | 2.0 | 5 | 8        | 18 | 3.51    |
| DN 125 | 5"   | 250    | 145 | 18 | 210 | 2.0 | 5 | 8        | 18 | 4.31    |
| DN 150 | 6"   | 285    | 174 | 18 | 240 | 2.0 | 5 | 8        | 22 | 5.22    |
| DN 200 | 8"   | 340    | 225 | 20 | 295 | 2.0 | 5 | 8        | 22 | 7.53    |
| DN 250 | 10"  | 395    | 279 | 22 | 350 | 2.0 | 5 | 12       | 22 | 9.82    |
| DN 300 | 12"  | 445    | 330 | 26 | 400 | 2.0 | 5 | 12       | 22 | 13.36   |
| DN 350 | 14"  | 505    | 362 | 28 | 460 | 2.0 | 5 | 16       | 22 | 20.07   |
| DN 400 | 16"  | 565    | 413 | 32 | 515 | 2.5 | 6 | 16       | 25 | 27.35   |
| DN 450 | 18"  | 615    | 464 | 34 | 565 | 2.5 | 6 | 20       | 25 | 31.53   |
| DN 500 | 20"  | 670    | 515 | 38 | 620 | 2.5 | 6 | 20       | 25 | 40.10   |
| DN 600 | 24"  | 780    | 618 | 44 | 725 | 2.5 | 6 | 20       | 30 | 56.55   |