




STAINLESS STEEL
150 LBS SCREWED FITTINGS
BSPP (ISO 228-1), BSPT (ISO 7-1), NPT THREAD
 DIMENSION CONFORM TO ASME B16.3 AND ANSI/MSS SP-114-2018 WHERE APPLICABLE
 MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
 PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
 MADE BY LOST WAX INVESTMENT CASTING

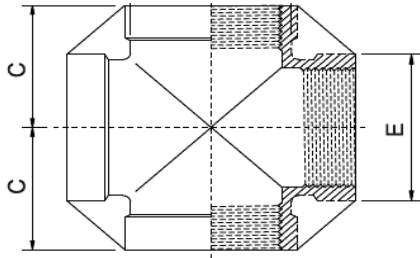

CROSS

SIZE	E	C	Weight
	(mm)	(mm)	(Kg/Pc)
1/8"	14.2	16.5	0.040
1/4"	17.3	18.6	0.050
3/8"	20.9	21.0	0.060
1/2"	26.8	26.3	0.110
3/4"	32.3	30.5	0.170
1"	40.0	35.6	0.260
1 1/4"	49.0	42.5	0.400
1 1/2"	55.8	44.8	0.540
2"	68.3	56.0	0.830
2 1/2"	90.0	67.4	1.740
3"	100.0	74.5	1.862
4"	127.0	90.4	3.240