




STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

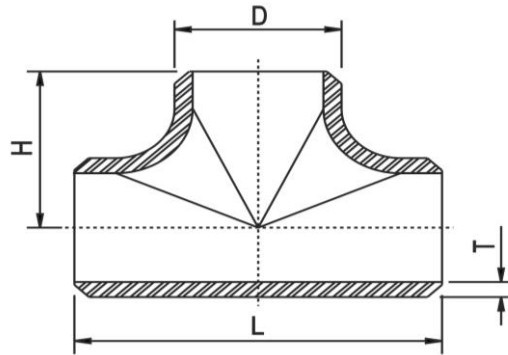

BUTT WELD EQUAL TEE

SIZE	SCH	D	T	H	L	Weight
		(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
½"	10s	21.3	2.11	25.4	50.8	0.07
½"	40s	21.3	2.77	25.4	50.8	0.09
¾"	10s	26.7	2.11	28.6	57.5	0.09
¾"	40s	26.7	2.87	28.6	57.2	0.12
1"	10s	33.4	2.77	38.1	76.5	0.19
1"	40s	33.4	3.38	38.1	76.2	0.25
1¼"	10s	42.2	2.77	47.6	95.0	0.30
1¼"	40s	42.2	3.56	47.6	95.2	0.33
1½"	10s	48.3	2.77	57.2	115.0	0.43
1½"	40s	48.3	3.68	57.2	114.4	0.60
2"	10s	60.3	2.77	63.5	127.5	0.58
2"	40s	60.3	3.91	63.5	127.0	0.87
2½"	10s	73.0	3.05	76.2	152.4	1.10
2½"	40s	73.0	5.16	76.2	152.4	1.70
3"	10s	88.9	3.05	85.7	171.4	1.37
3"	40s	88.9	5.49	85.7	171.4	1.90
4"	10s	114.3	3.05	104.8	209.6	2.15
4"	40s	114.3	6.02	104.8	209.6	4.13