




STAINLESS STEEL BUTT WELDED FITTINGS

DIMENSION CONFORM TO ASME B16.9
MATERIAL CONFORM TO ASTM A351 GR. CF8 & CF8M
PRESSURE-TEMPERATURE RATINGS 300 PSI (-29 TO 66°C)
MADE BY LOST WAX INVESTMENT CASTING

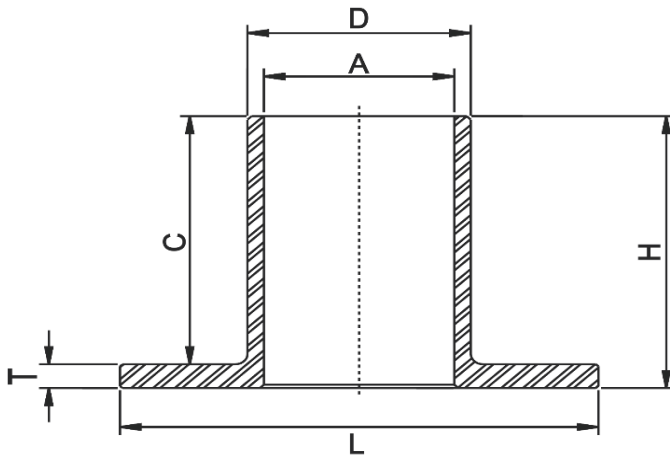

BUTT WELD STUB END

SIZE	SCH	D	A	T	C	H	L	Weight
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(Kg/Pc)
½"	10s	21.70	17.50	3.0	37.0	40.0	52.0	0.08
¾"	10s	27.20	23.00	3.5	36.5	40.0	58.0	0.11
1"	10s	34.00	28.40	3.5	46.5	50.0	70.0	0.19
1¼"	10s	42.70	37.10	3.5	46.5	50.0	80.0	0.25
1½"	10s	48.60	43.00	4.0	46.0	50.0	85.0	0.28
2"	10s	60.33	54.73	4.0	46.0	50.0	100.0	0.35
2½"	10s	76.30	70.20	4.0	46.0	50.0	120.0	0.50
3"	10s	88.90	82.80	4.0	46.0	50.0	130.0	0.54
4"	10s	114.30	108.20	4.0	46.0	50.0	155.0	0.66
5"	10s	141.30	134.50	5.0	45.0	50.0	185.0	1.04
6"	10s	168.30	161.50	5.0	45.0	50.0	215.0	1.20
8"	10s	219.10	211.58	5.0	60.0	65.0	265.0	2.11
10"	10s	273.00	264.62	5.0	60.0	65.0	325.0	2.99